
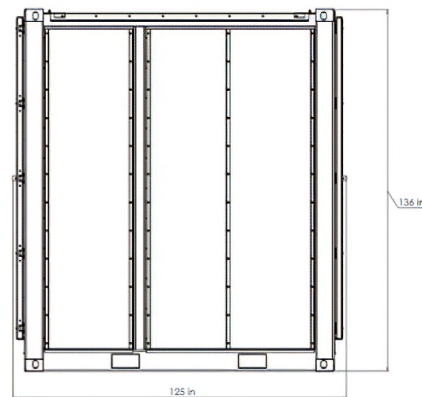
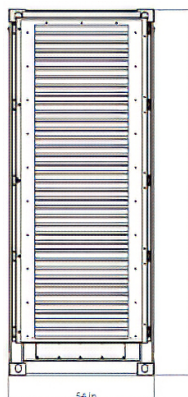


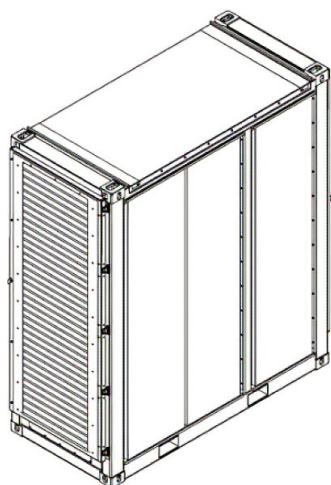

Model	ES-L4-06	ES-L4-07	ES-L4-08	ES-L4-09	ES-L4-10
AC Rated Power	180 kW	210 kW	240 kW	270 kW	300 kW
Nameplate Energy Capacity (DC)	725 kWh	846 kWh	966 kWh	1087 kWh	1208 kWh
Usable Energy (AC)*	600 kWh	700 kWh	800 kWh	900 kWh	1000 kWh
AC Rated Current	217 A	253 A	289 A	325 A	361 A
Weight	19,069 lbs	21,144 lbs	23,220 lbs	25,295 lbs	27,370 lbs
Dimensions (W x D x H)	54 in x 125 in x 136 in (1372 mm x 3175 mm x 3454 mm)				
Nominal Voltage	480 V AC (+/-10%), 3-phase, 3 Wire + Ground				
Operating Frequency	60 Hz (45 Hz – 65 Hz)				
Adjustable Power Factor	-1 to +1				
THDi	< 3%				
Power Factor Correction	> 99%				
Noise Emission	< 85 dB				
Thermal Management	Proprietary Forced Air				
Operating Temp Range	-30 °C to 55 °C (-22 °F to 131 °F)				
Storage Temp Range	5 °C to 40 °C (41 °F to 104 °F)				
Rated altitude	2000 m / 6562 ft				
Enclosure	NEMA TYPE 3R				
AC/AC RTE	>90%				
Grid Support Utility-Interactive Functions	Four-Quadrant Operation, Volt-VAR, Volt-Watt, Frequency-Watt, Reactive Power Control				
Communication	Modbus TCP/IP SunSpec® Compliant				
FCC	Class A				
Regulatory	UL1973, UL9540, UL9540A 6th Edition, NFPA68, NFPA69 UL1741 SB, IEEE 1547				

*Nominal usable energy at AC terminals, Day 1. Multiple units may be used on a single site.

Request a Quote: quotes@myerseps.com

Customer Service: (610) 868-3500

